

# Aerion Series® Class A1 Louvre

The Louvreclad Aerion Series® is the world's highest performing vertical/horizontal louvre. Aerion Series® is engineered for Class A 99-100% effective rain resistance and Class 1 aerodynamics, delivering a sleek, zero-vision ventilation screen.

Australian Design Registration No: 202519716

## Features

### PERFORMANCE

#### Lowest Pressure Drop

Engineered and rigorously tested to AS4740:2025, delivering advanced aerodynamic efficiency and exceptionally low pressure drop performance.

### AESTHETICS

#### Seamless Facade Integration

Seamless lines, minimal framing, and large max spans. Your facade will look beautiful.

### SUSTAINABILITY

#### Low-Carbon Aluminium

Extremely low-carbon aluminium options are available to meet carbon compliance requirements.

## Specifications

### AUSTRALIAN STANDARDS

Performance tested to AS 4740:2025

### ORIENTATION

Vertical/Horizontal

### MATERIAL

6060 T5 Extruded Aluminium

### FINISH

Dulux powder coat range,  
Interpon powder coat range,  
Sapphire anodised range,  
Universal anodised range

### ACCESSORIES

Vermin mesh, insect mesh,  
SL81 mesh

### INSTALLATION

Installation and mounting details will be designed in accordance with proprietary systems and recommendations as designed and manufactured by Louvreclad.

# Explore the profile options

## Aerion Series® Vertical

A-1 vertical louvre system



### Class 1

AERODYNAMICS

**0.81 CD**

DISCHARGE  
COEFFICIENT

**0.45 m<sup>2</sup>**

EFFECTIVE  
AERODYNAMIC AREA

### Class A

RAIN RESISTANCE

**99-100%**

EFFECTIVE RAIN  
RESISTANCE

**73%**

FREE OPEN AREA

**150mm**

DEPTH

**Variable**

WIDTH

**30mm**

PITCH

**3000mm**

MAX SPAN

**30kg/m<sup>2</sup>**

WEIGHT

**Vertical**

ORIENTATION

## AS 4740:2025 Rain Resistance

### Aerion Series® Vertical

Ventilator Core Velocity (m/second)	0	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5
Effectiveness Extended Range (%)	99.3%	99.0%	99.0%	99.0%	99.5%	99.4%	99.3%	99.2%	99.3%	99.4%	99.2%
Effectiveness Standard Range (%)	99.9%	99.9%	99.8%	99.9%	100.0%	100.0%	100.0%	100.0%	-	-	-
Classification	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1

Standard range allows for nominal rainfall rate of 75 L/hr/m<sup>2</sup> and a wind velocity of 13 m/s.

Extended range allows for nominal rainfall rate of 203 L/hr/m<sup>2</sup> and a wind velocity of 22.4 m/s.

# Explore the profile options

## Aerion Series® Horizontal

A-1 horizontal louvre system



### Class 1

AERODYNAMICS

**0.79 CD**

DISCHARGE  
COEFFICIENT

**0.41 m<sup>2</sup>**

EFFECTIVE  
AERODYNAMIC AREA

### Class A

RAIN RESISTANCE

**99-100%**

EFFECTIVE RAIN  
RESISTANCE

**68%**

FREE OPEN AREA

**150mm**

DEPTH

**Variable**

WIDTH

**25mm**

PITCH

**1500mm**

MAX SPAN

**35kg/m<sup>2</sup>**

WEIGHT

**Horizontal**

ORIENTATION

## AS 4740:2025 Rain Resistance

### Aerion Series® Horizontal


Ventilator Core Velocity (m/second)	0	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5
Effectiveness Standard Range (%)	100%	100%	100%	99.8%	99.7%	99.6%	99.5%	99%	-	-	-
Classification	A1	A1	A1	A1	A1	A1	A1	A1	-	-	-

Standard range allows for nominal rainfall rate of 75 L/hr/m<sup>2</sup> and a wind velocity of 13 m/s.




## Inspire with Quality

As leaders in the building envelope market, we are known for exceptional quality and lasting value. Our credibility, wealth of knowledge, and unmatched competence enable us to inspire exterior solutions that look good and perform better.

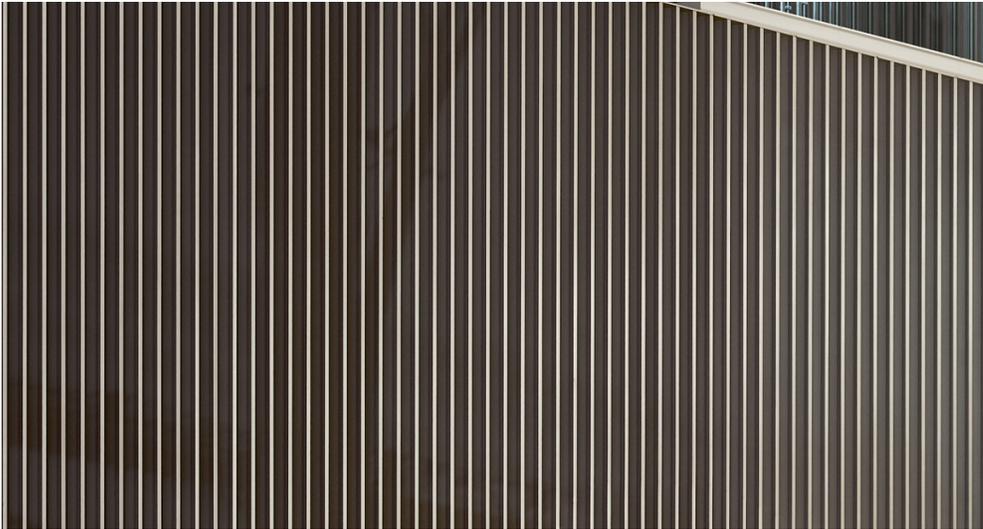

## The MadeRight Guarantee

Following our proven process enables us to develop solutions we're proud to put our mark of quality to. We guarantee that all projects will be delivered in a timely manner, be on specification, engineered to Australian standards and finished to the highest quality.

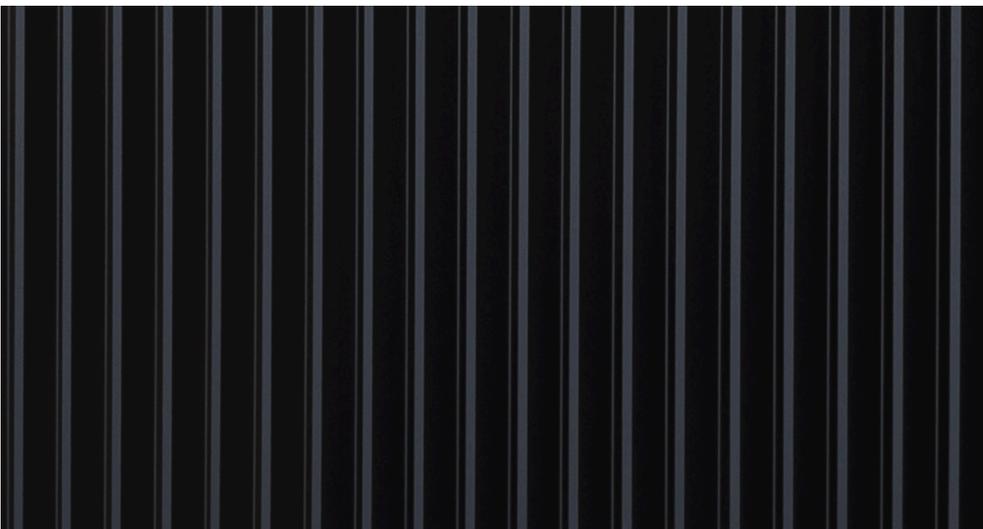

## Made to Perform

Louvreclad solutions are made to last and manufactured on-site using high-quality Australian aluminium and steel. As an organisation we are driven to get a thousand things right everyday to achieve our vision to be the face of Australian Building.

Our facades are not here to be average, they are here to perform – and so are we.

# Award-Winning

---

## Industry-acclaimed innovation

Proud recipient of the ZAK World of Facades Innovation Award and AIRAH Awards 2025, setting the benchmark for next-generation louvre performance.



## Technical Data Disclaimer

- Performance data presented is for a nominal 1x1m louvre tested to AS 4740:2025. Project specific performance may vary with louvre size and installation details - please refer to Louvre Performance Calculator or contact a Louvreclad technical representative.
- Indicative maximum spans provided are based on a generic permissible design wind pressure of 2kPa.
- Span values and product technical information provided are subjected to variance by project specific requirements & influence factors such as building location, terrain category & local pressure effects.
- Spans values provided are based on a typical scenario where products specified are fixed at one end; simply supported at the other end and in either horizontal or vertical orientation.
- If the product specified is required to function as a barrier for fall protection or as a trafficable element, the maximum span and pitch nominated may be reduced.
- Spans values provided could be influenced and reduced when used in dynamically sensitive wind environment.

For project specific product selection or preliminary design & engineering consultation, please contact 1300 165 678 or [sales@louvreclad.com](mailto:sales@louvreclad.com) to arrange or book a meeting.

## Speak to an expert

Reach out today to discuss your facade solution requirements; we would love to hear from you.

