

Louvreclad Bremer Series® are slim-line aluminium louvre blades, ideal for horizontal awnings or vertical screens. Non-combustible, customisable pitch, and engineered for durability. Perfect for a fine-line linear aesthetic.

Features

PERFORMANCE

Superior Sun-Shading

The Bremer Series® features a 45x11mm elliptical louvre with variable blade pitch and angle, offering excellent sun-shading performance for commercial buildings and schools.

AESTHETICS

Slim-Line Design

Provides fine, clean lines and a light, linear aesthetic. Available in powder-coated or anodised finishes, it complements contemporary architecture beautifully.

DESIGN

Versatile Installation

Suitable for horizontal window shading, vertical screens, and awnings. Customisable blade pitch and angle ensure functionality and aesthetic appeal.

Specifications

INSTALLATION

Installation and mounting details will be designed in accordance with proprietary systems and recommendations as designed and manufactured by Louvreclad.

Explore the profile options



Technical Data Disclaimer

- Indicative maximum span provided are based on generic permissible design wind pressure of 2kPa.
- Span values and product technical information provided are subjected to variance by project specific requirements & influence factors such building location, terrain category & local pressure effects.
- Span values provided are based on typical scenario where product specified are fixed at one end; simply supported at the other end and in either horizontal or vertical orientation.
- If the product specified is required to function as barrier for fall protection or as trafficable element, maximum span and pitch nominated may be reduced.
- · Spans values provided could be influenced and reduced when used in dynamically sensitive wind environment.
- For project specific product selection or preliminary design & engineering consultation, please contact 1300 165 678 or sales@louvreclad.com to arrange or book a meeting.

DAY DESIGN

PRESSURE DROP TEST CERTIFICATE

Test 4203J-P



Face Velocity (m/s)	Pressure Drop (Pa)
0.5	0.9
1.0	2.7
1.5	5.4
2.0	8.8
2.5	12.8
3.0	17.4
3.5	22.5
4.0	28.2
4.5	34.4
5.0	41.1

Test Specimen:

Bremer Series Louvre

Test Specimen Dimensions:

1800 mm (H) x 1200 mm (W) x 32 mm (D)

Specimen Specifications:


48% Open Area per Module Blades @ 40 mm Pitch & 45° angle Throat Height @ 20 mm

Test Location:

Twin Reverberation Rooms National Acoustic Laboratories 126 Greville Street, Chatswood NSW

Instrumentation:

- Vaisala Digital Barometer (Type PTB201AD)
- Kestrel Anemometer (Model K2000)

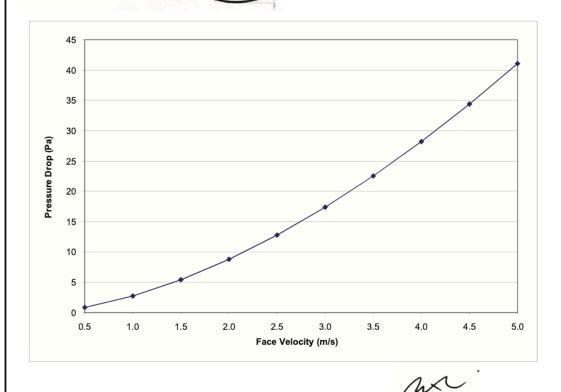

Date of Test: Tuesday, 25 August 2009

Project Number: 4203J-P

Test Enginer: Alex Li, BE(Mech) Hons

For and on behalf of Day Design Pty Ltd



Inspire with Quality

As leaders in the building envelope market, we are known for exceptional quality and lasting value. Our credibility, wealth of knowledge, and unmatched competence enable us to inspire exterior solutions that look good and perform better.



The MadeRight Guarantee

Following our proven process enables us to develop solutions we're proud to put our mark of quality to. We guarantee that all projects will be delivered in a timely manner, be on specification, engineered to Australian standards and finished to the highest quality.



Made to Perform

Louvreclad solutions are made to last and manufactured on-site using high-quality Australian aluminium and steel. As an organisation we are driven to get a thousand things right everyday to achieve our vision to be the face of Australian Building.

Our facades are not here to be average, they are here to perform – and so are we.

Speak to an expert

Reach out today to discuss your facade solution requirements; we would love to hear from you.

