

Sheraton Series® External Aluminium Louvres

Louvreclad Sheraton Series® 75mm modular aluminium sun blades offer ellipsoid, bullet, and panel configurations. Supporting vertical spans up to 4.5m, they're ideal for shading in cyclonic regions.

Features

PERFORMANCE

Superior Strength

75mm modular sun blades support vertical spans up to 4.5m, ideal for cyclonic regions. Engineered for durability and long-lasting performance.

AESTHETICS

Architectural Versatility

Available in ellipsoid, bullet, and panel configurations. Provides a distinctive look for building facades, enhancing visual appeal.

DESIGN

Flexible Installation

Suitable for vertical and horizontal mounting. Concealed mounting options available for a sleek finish. Delivered ready-made for single-trade installation.

Specifications

INSTALLATION

Installation and mounting details will be designed in accordance with proprietary systems and recommendations as designed and manufactured by Louvreclad.

Explore the profile options

Sheraton Series®

75mm modular aluminium sun blades



Variable mm
DEPTH

75 mm
THICKNESS

Sheraton 440 Panel

Sheraton Series®
75x440mm Panel



440 mm
DEPTH

75 mm
THICKNESS

Sheraton 640 Panel

Sheraton Series®
75x640mm Panel



640 mm
DEPTH

75 mm
THICKNESS

Sheraton 520 Bullet

Sheraton Series®
75x520mm Bullet



520 mm
DEPTH

75 mm
THICKNESS

Sheraton 720 Bullet

Sheraton Series®
75x720mm Bullet



720 mm
DEPTH

75 mm
THICKNESS

Sheraton 600 Ellipsoid

Sheraton Series®
75x600mm Ellipsoid



600 mm
DEPTH

75 mm
THICKNESS

Sheraton 800 Ellipsoid



800 mm
DEPTH

75 mm
THICKNESS

Sheraton Series®
75x800mm Ellipsoid

Sheraton 360 Chamfer



360 mm
DEPTH

75 mm
THICKNESS

Sheraton Series®
75x360mm Chamfer

Sheraton 560 Chamfer



560 mm
DEPTH

75 mm
THICKNESS

Sheraton Series®
75x560mm Chamfer

Technical Data Disclaimer


- Indicative maximum span provided are based on generic permissible design wind pressure of 2kPa.
- Span values and product technical information provided are subjected to variance by project specific requirements & influence factors such building location, terrain category & local pressure effects.
- Span values provided are based on typical scenario where product specified are fixed at one end; simply supported at the other end and in either horizontal or vertical orientation.
- If the product specified is required to function as barrier for fall protection or as trafficable element, maximum span and pitch nominated may be reduced.
- Spans values provided could be influenced and reduced when used in dynamically sensitive wind environment.
- For project specific product selection or preliminary design & engineering consultation, please contact 1300 165 678 or sales@louvreclad.com to arrange or book a meeting.





Inspire with Quality

As leaders in the building envelope market, we are known for exceptional quality and lasting value. Our credibility, wealth of knowledge, and unmatched competence enable us to inspire exterior solutions that look good and perform better.

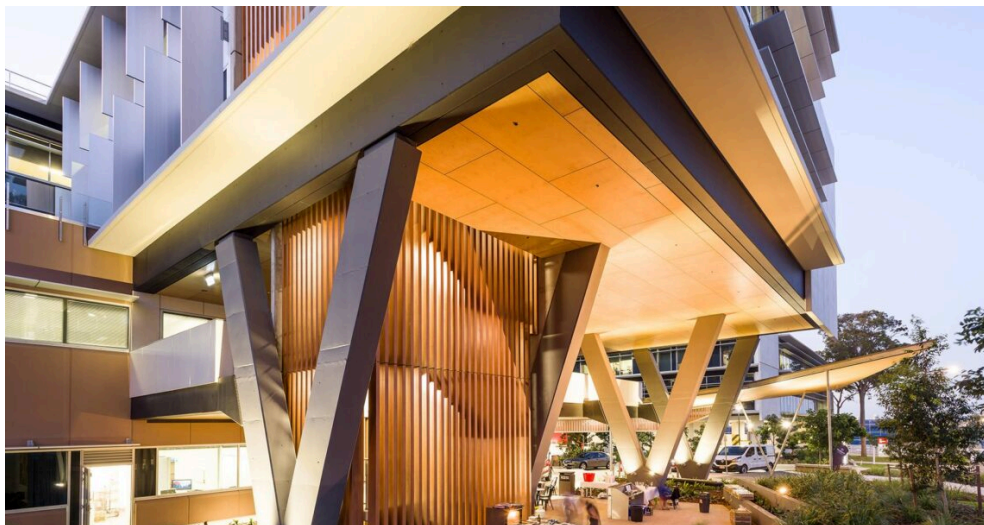

The MadeRight Guarantee

Following our proven process enables us to develop solutions we're proud to put our mark of quality to. We guarantee that all projects will be delivered in a timely manner, be on specification, engineered to Australian standards and finished to the highest quality.



Made to Perform

Louvreclad solutions are made to last and manufactured on-site using high-quality Australian aluminium and steel. As an organisation we are driven to get a thousand things right everyday to achieve our vision to be the face of Australian Building. Our facades are not here to be average, they are here to perform – and so are we.

Speak to an expert

Reach out today to discuss your facade solution requirements; we would love to hear from you.



Made to Perform

1300 165 678

sales@louvrecld.com

louvrecld.com